




### Features

- Ultra High Resolution: 680 TV lines
- Wide Dynamic Range
- Vari-focal f=2.8 ~ 10.5mm
- Minimum illumination: 0.1 Lux
- Vandal Resistant
- IP66 Weather Proof Standard
- 8 Privacy Masks
- OSD Menu

### Dimensions

Unit: mm

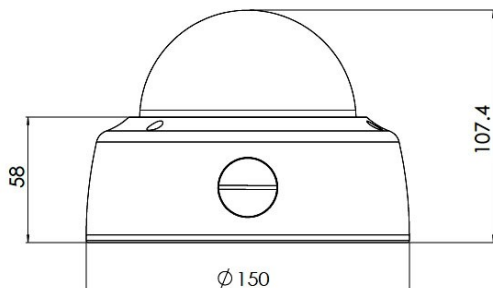

### Specifications

<b>MODEL</b>	<b>DF166</b>	
<b>PICK UP DEVICE</b>	1/3" Sony 960H CCD	
<b>TOTAL PIXELS</b>	PAL: 1024 (H) x 596 (V)	NTSC: 1024 (H) x 508 (V)
<b>HORIZONTAL RESOLUTION</b>	680 TVL	
<b>LENS</b>	2.8mm ~ 10.5mm ( Aspherical IR lens )	
<b>VIEW ANGLE ( HORIZONTAL )</b>	28° ~ 99.5°	
<b>AUTO IRIS LENS</b>	Yes	
<b>MIN. ILLUMINATION</b>	0.1 Lux / F1.2	
<b>WEATHER PROOF STANDARD</b>	IP66	
<b>ELECTRONIC SHUTTER</b>	PAL: 1/50 ~ 1 / 100,000 sec	NTSC: 1/60 ~ 1 / 100,000 sec
<b>ELECTRONIC SHUTTER CONTROL</b>	Built-in	
<b>BACK LIGHT COMPENSATION</b>	On / Off Switchable	
<b>WIDE DYNAMIC RANGE</b>	Yes	
<b>S / N RATIO</b>	More than 52dB ( AGC OFF )	
<b>WHITE BALANCE</b>	Auto	
<b>VIDEO OUTPUT CONNECTOR</b>	1.0Vp-p (75W , composite)	
<b>AUTO GAIN CONTROL</b>	Yes	
<b>OSD MENU</b>	Multi-language	
<b>PRIVACY MASK</b>	8	
<b>NOISE REDUCTION</b>	Auto	
<b>POWER SOURCE</b>	12V DC / 300 mA	
<b>OPERATING TEMPERATURE</b>	-10° ~ +50°	
<b>NET WEIGHT ( G )</b>	900	
<b>DIMENSION</b>	150mm diameter x 108 (H) mm	

### TeleEye Group

China Croatia Hong Kong Macau Mauritius  
Philippines Singapore South Africa U.K. Sri Lanka

Design and specifications are subject to change without prior notice. Copyright © 2011 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.