




Features

- Ultra High Resolution: 540 TV lines
- Wide Dynamic Range
- Auto Iris Lens
- Minimum illumination: 0.8 Lux / F1.2 ; Sense Up: 0.02 Lux / F1.2
- CS / C mount

Dimensions

Unit: mm

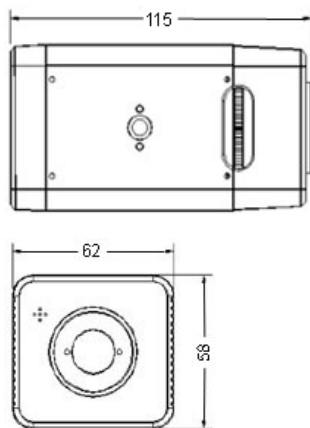

Specifications

MODEL	SF373F	
PICK UP DEVICE	1/3" Pixim DPS Sensor	
TOTAL PIXELS	720 (H) x 540 (V)	
HORIZONTAL RESOLUTION	540 TVL	
AUTO IRIS LENS	Video / DC switchable	
LENS MOUNT	CS / C mount	
MIN. ILLUMINATION	Colour: 0.8 Lux / F1.2 Sense Up: 0.02 Lux / F1.2	
ELECTRONIC SHUTTER	PAL 1/50 ~ 1 / 100,000 sec	NTSC 1/60 ~ 1 / 100,000 sec
ELECTRONIC SHUTTER CONTROL	Built-in	
WIDE DYNAMIC RANGE	Yes	
BACK LIGHT COMPENSATION	On / Off selectable	
S / N RATIO	More than 50dB (AGC OFF)	
WHITE BALANCE	ATW / AWB / Manual	
VIDEO OUTPUT CONNECTOR	1.0 Vp-p, 75Ω	
AUTO GAIN CONTROL	Low / Medium / High / Custom	
OSD MENU	English	
NOISE REDUCTION	Auto	
POWER SOURCE	12V DC / 300mA	
OPERATING TEMPERATURE	-10°C ~ +50°C	
HUMIDITY	<90%	
NET WEIGHT (G)	330	
DIMENSION	115 (L) x 62 (W) x 58 (H) mm	

TeleEye Group

**China Croatia Hong Kong Macau Mauritius
Philippines Singapore South Africa Sri Lanka U.K.**

DISTRIBUTED BY: